



SMART STAND FAN WITH AI VOICE CONTROL
KOSMEN ECO-F40AI-B
USER MANUAL

Thank you for choosing
SMART STAND FAN WITH AI VOICE CONTROL
KOSMEN ECO-F40AI-B

Please read the instruction manual carefully before use.

Please save the instructions for future use

Contents

| | |
|---|----------|
| 1. Safety Precautions | 1 |
| 2. Specifications..... | 2 |
| 3. Circuit diagram..... | 2 |
| 4. Function of the button | 2 |
| 5. Product structure..... | 5 |
| 6. Cleaning & Maintenance, Warranty..... | 5 |
| 7. Voice control..... | 6 |
| 8. Special Statement | 8 |

Mục lục

| | |
|-------------------------------------|----|
| 1. Những lưu ý khi sử dụng | 9 |
| 2. Thông số kỹ thuật | 10 |
| 3. Sơ đồ mạch điện | 10 |
| 4. Chức năng nút điều khiển | 10 |
| 5. Cấu tạo sản phẩm | 13 |
| 6. Bảng câu lệnh giọng nói | 14 |
| 7. Vệ sinh, bảo hành, bảo trì | 15 |


1. Safety Precautions

- This product is for indoor use at home only, do not use it in outdoor places or other commercial or industrial uses.
- Before plugging in, please confirm whether the power supply of the socket is consistent with this product.
- This product is limited to the use of single*phase AC 220V 50Hz power supply.
- If the fan fails, please pull out the plug first and contact a professional maintenance personnel for repair. Do not self disassemble, repair or replace parts.
- Please place the product on a flat ground for use.
- Please make sure that the plug is in good contact with the socket. If you find that the plug is loose when inserted into the socket please replace the socket to avoid a fire hazard due to poor contact.
- When pulling out the plug, hold the plug tightly, and do not pull the plug out by pulling the power cord.
- Keep the fan away from heat sources, such as open flames, cooking equipment or other heating equipment.
- Please keep away from flammable or explosive gases, such as gas gases, when using the fan.
- Do not insert fingers or other sharp objects (such as pens, chopsticks, etc.) into this product when using, so as to avoid it dangerous.
- Do not use this product at high temperatures (above 40°C) or in dusty places.
- When using, please do not put water and other liquids into the fan to avoid the risk of electric shock.
- Do not use this fan in places with high humidity, such as bathrooms and near swimming pools.
- Do not use the fan by hanging it on the wall or hanging it from the ceiling.
- Please turn off the fan and unplug the plug from the socket before cleaning.
- 16 Please pull the plug out of the socket when not in use for a long time
- This fan is not suitable for people with physical, sensory or intellectual disabilities (including children) or inexperience
- and by knowledgeable persons, unless they have been supervised or instructed by the person responsible for security.
- Adults should instruct children not to play with this fan.
- If the power cord is damaged, in order to avoid danger, it must be done by the manufacturer, its repair department or class similar to the change of professional staff in the department.

2. Specifications


| | |
|---------------------|---|
| Model | ECO-F40AI-B |
| Wind Speeds | 12 Adjustable Levels, |
| 4 mode win | Child Wind Mode, Natural Wind Mode, Sleep Mode, Smart Wind Mode |
| Power Consumption | 40W / AC Motor |
| Control Type | AI Voice + Remote + Digital Panel |
| Airflow Distance | ≥6.2 meters |
| Net Weight (N.W.) | 3.8 kg |
| Gross Weight (G.W.) | 5.3 kg |
| Product Dimensions | 310 × 310 × 1080 mm |

3. Circuit diagram

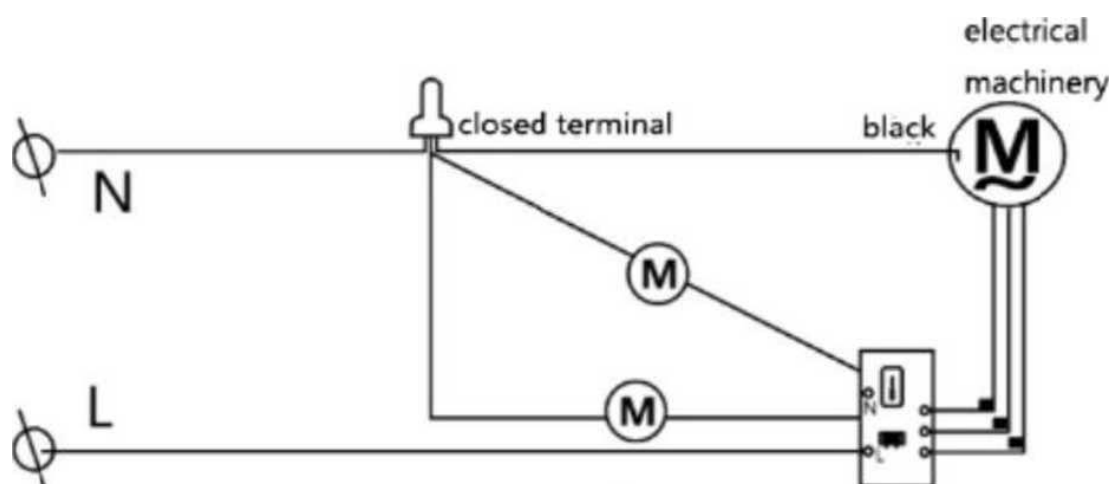


4. Function of the button


* The button display

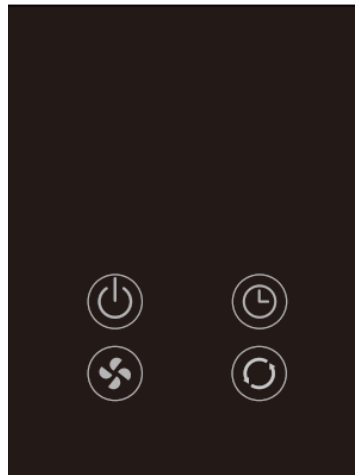


4.1.Standby state: Plug in the power plug, the LCD display lights up, showing “— —”and enters the standby state.

4.2.Power on/off: Press once power button to turn on the circulating fan, the default is 6 wind speed start, and the display shows “06”. Press again to turn off all functions and enter standby.

4.3.Touch  wind speed button to adjust the fan gear. A total of 12 gears can be adjusted (01 -12), and the wind speed from 1st to 12th gear is gradually increased.

4.4.Touch  timer button to set time. The first one shows "00". Each press adds 1 hour (showing 01, 02 ...up to 12 hours). After 12 hours, it loops back to "00". After setting, the digital screen jumps back to gear display.

4.5.Shake head function: 

Touch one time: turn on the left and right shaking heads.

Touch second time : turn on the head up and down.

Touch third time: Shake head left and right, up and down.

Touch forth time: Turn off all shaking heads.

4.6.Auto screen off and wake up:

No operation for 3 minutes, and the electronic board enters the screen off state.

Press the first dick of any button to wake up the electronic board (display the current status).

Press the second lower button to operate.

4.7.Ambient Light Control:


Press and hold to timer button turn the ambient light on or off.

This operation can also be done in standby mode (turning the ambient light on or off).

(The same goes for voice control).




Turn off the ambient light when it is turned on, and the ambient light will turn off synchronously.

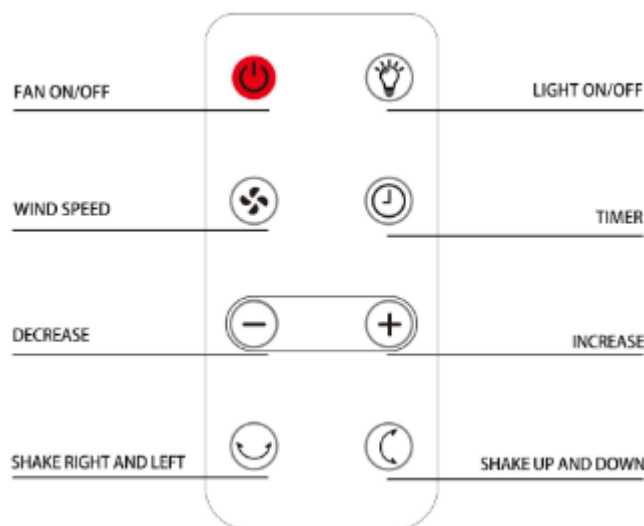


*The button remote





On /OFF button: To activate or deactivate the function and enter standby mode, press this button. At the same time, the buzzer will emit a "beep" sound as a prompt. This button also increases the wind speed function.

After the fan starts, it will automatically enter the natural wind mode.


Wind speed key: Firstly press  key, then press   key to adjust the speed from one to twelve speeds.

Timer key: Firstly press , then press   to set the automatic shutdown time of the fan, which ranges from one to twelve hours.

Shaking key: When the fan is on, press  and it will shake right and left, press  it will shake up and down. If you want to stop the shaking, press this key again and the fan will stop shaking.

Light on/off button: Press  to turn the light on or off.

5. Product structure

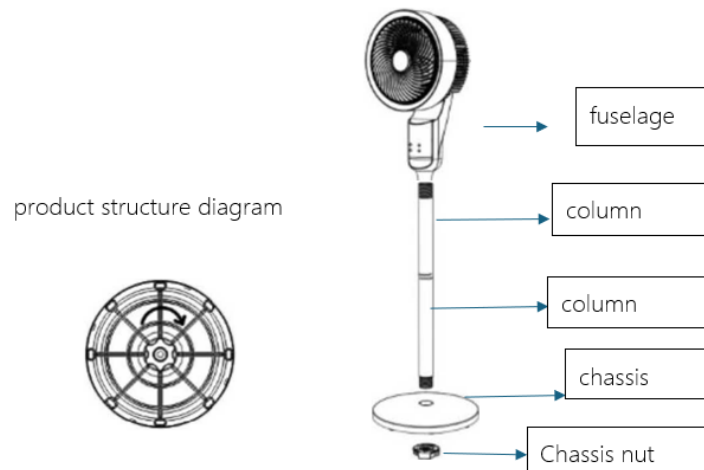

Product assembly

1. Take out the column rod with the lock nut from the packing box, and rotate the lock nut counterclockwise to remove.
2. Assemble the two column rods together in rotation
3. Take out the chassis, insert one end of the column rod tightening lock nut into the center hole of the chassis, and tighten the lock nut on the back of the chassis Screw on the pole of the column.
4. Take out the fuselage, insert the bottom of the fuselage into the column, and rotate and screw into the column rod.

*Note: This product is a 3D head shake for air supply, and the air supply angle cannot be adjusted by hand to avoid damage to the head shake mechanism

6. Cleaning & Maintenance, Warranty

- Before cleaning and maintenance, please turn off the fan and unplug the power cord from the socket
- For dirty areas on the exterior of the unit you can use a neutral cleaner to dampen a cloth and wipe, then wipe clean with a soft doth.
- Do not use volatile solvents such as toluene, alcohol, or gasoline to wipe the plastic casing, as this may cause discoloration or deterioration of the plastic

- Do not immerse this product in water for cleaning or rinse it with a faucet.
- 4.If not use after cleaning, please store this product in a dry place.

***Warranty Terms**

1. According to the terms of this warranty, please use this product under normal conditions during the warranty period, in case of any fault, you can contact Kosmen for warranty.

2. During the warranty period, paid maintenance service will be provided in the following cases:

- Errors and damages caused by force majeure.
- Damage or failure due to transportation, handling.
- Damage or failure due to failure to operate according to the operating instructions.
- Errors or damage due to disassembly, repair or modification of the product without the manufacturer's permission.

3. When the product needs warranty, please send the machine to the nearest Kosmen address for warranty.

Warranty period

Customers will enjoy 1 year of free warranty service from the date of purchase.

7. Voice control

| User Command (Vietnamese) | System Response (Vietnamese) |
|---------------------------|---|
| | Welcome my master, to give orders please say "Xin chao Kosmen" |
| Xin chao Kosmen | Yes, how can I help you? / Yes, hello master. |
| | If you want to give a command, please call me again by saying "Xin chao Kosmen" |
| Increase the volume | Volume increased |
| Turn down the volume | Volume decreased |
| Maximum volume | Volume set to maximum |
| Minimum volume | Volume set to minimum |
| Mute | Muted |
| Unmute | Unmuted |
| Turn on fan | Fan turned on |
| Turn off fan | Fan turned off |
| Turn on speed 1 | Speed level 1 |
| Turn on speed 2 | Speed level 2 |
| Turn on speed 3 | Speed level 3 |
| Turn on speed 4 | Speed level 4 |

| | |
|----------------------------|--------------------------------------|
| Turn on speed 5 | Speed level 5 |
| Turn on speed 6 | Speed level 6 |
| Turn on speed 7 | Speed level 7 |
| Turn on speed 8 | Speed level 8 |
| Turn on speed 9 | Speed level 9 |
| Turn on speed 10 | Speed level 10 |
| Turn on speed 11 | Speed level 11 |
| Turn on speed 12 | Speed level 12 |
| Set timer for 1 hour | Timer set to turn off after 1 hour |
| Set timer for 2 hours | Timer set to turn off after 2 hours |
| Set timer for 3 hours | Timer set to turn off after 3 hours |
| Set timer for 4 hours | Timer set to turn off after 4 hours |
| Set timer for 5 hours | Timer set to turn off after 5 hours |
| Set timer for 6 hours | Timer set to turn off after 6 hours |
| Set timer for 7 hours | Timer set to turn off after 7 hours |
| Set timer for 8 hours | Timer set to turn off after 8 hours |
| Set timer for 9 hours | Timer set to turn off after 9 hours |
| Set timer for 10 hours | Timer set to turn off after 10 hours |
| Set timer for 11 hours | Timer set to turn off after 11 hours |
| Set timer for 12 hours | Timer set to turn off after 12 hours |
| Child wind mode | Child wind mode activated |
| Natural wind mode | Natural wind mode activated |
| Sleep mode | Sleep mode activated |
| Smart wind mode | Smart wind mode activated |
| Timer off | Timer canceled |
| Turn left and right on | Left-right oscillation activated |
| Turn left and right off | Left-right oscillation stopped |
| Turn up and down on | Up-down oscillation activated |
| Stop up and down | Up-down oscillation stopped |
| Turn figure eight on | Figure-eight oscillation activated |
| Stop figure eight rotation | Figure-eight oscillation stopped |
| Turn on light | Turn on light |
| Turn off light | Light turned off |

8. Special Statement

- The manual has been carefully proofread, if there are errors or omissions in printing or misunderstanding in content The company reserves the right of interpretation.
- The manual is general for air circulation fans, if there are any technical changes to this product in the future, without prior notice.
- If there is any change in the appearance and color of the product, the actual product shall prevail.

| Product parts | Harmful substance | | | | | |
|-------------------------------------|-------------------|------|------|----------|-------|--------|
| | (Pb) | (Hg) | (Cd) | (Cr(VI)) | (PBB) | (PBDE) |
| Plastic parts | X | 0 | 0 | X | X | X |
| Metal parts | 0 | 0 | 0 | X | 0 | 0 |
| Wire components | X | 0 | X | 0 | 0 | 0 |
| Shaking components | X | 0 | X | X | 0 | 0 |
| Selection switch components | X | 0 | 0 | X | X | X |
| PBC board assembly & remote control | X | 0 | X | X | X | X |
| Paster | 0 | 0 | X | 0 | 0 | 0 |
| Power line | 0 | 0 | 0 | 0 | X | X |
| shaded pole motor | X | 0 | 0 | X | X | X |

0: Indicates that the content of the hazardous substance in all homogeneous materials of the part is below the limit requirements specified in ROHS.

X: Indicates that the content of the hazardous substance in at least one of the homogeneous materials of the part exceeds the limit requirements specified in ROHS.

Illustrate:

Some models may not include some of the parts in the table, which is subject to the actual product.

The parts marked *x* cannot be replaced by hazardous substances due to the limitation of the industry technological development level.


1. Những lưu ý khi sử dụng

- Sản phẩm này chỉ dành cho sử dụng trong nhà. Không sử dụng ngoài trời hoặc cho mục đích thương mại hoặc công nghiệp.
- Trước khi cắm điện, hãy đảm bảo rằng nguồn điện ổ cắm phù hợp với thông số kỹ thuật của sản phẩm.
- Nguồn điện yêu cầu: Quạt sử dụng nguồn điện 1 pha AC 220V 50Hz.
- Trong trường hợp quạt gặp sự cố, đầu tiên nên rút phích cắm và liên hệ với nhân viên kỹ thuật chuyên nghiệp. Không tự ý tháo rời, sửa chữa hoặc thay thế linh kiện.
- Đặt trên bề mặt phẳng: Đặt quạt trên mặt phẳng và ổn định khi sử dụng.
- Đảm bảo phích cắm tiếp xúc tốt với ổ cắm. Nếu lỏng, cần thay ổ cắm để tránh nguy cơ cháy nổ do tiếp xúc kém.
- Luôn cầm vào phích cắm khi rút điện. Không kéo dây nguồn.
- Giữ quạt cách xa ngọn lửa, bếp hoặc các thiết bị sinh nhiệt khác.
- Không sử dụng quạt gần khí dễ cháy hoặc khí nổ (như khí gas).
- Không đưa vật thể lạ vào quạt: Không đưa ngón tay hoặc vật sắc nhọn (như bút, đũa...) vào quạt khi đang hoạt động để tránh gây nguy hiểm.
- Không dùng ở nơi có nhiệt độ cao, bụi bẩn. Không sử dụng sản phẩm ở nơi có nhiệt độ trên 40°C hoặc nhiều bụi.
- Không để chất lỏng vào quạt, tránh để nước hoặc chất lỏng khác tiếp xúc với quạt để tránh nguy cơ điện giật.
- Không sử dụng quạt ở nơi có độ ẩm cao như phòng tắm, gần hồ bơi...
- Không treo quạt lên tường hoặc trần nhà để sử dụng.
- Luôn tắt quạt và rút phích cắm trước khi vệ sinh.
- Nếu không sử dụng trong thời gian dài, hãy rút phích cắm ra khỏi ổ điện.
- Quạt không phù hợp cho người có hạn chế về thể chất, giác quan, trí tuệ hoặc thiếu kinh nghiệm, trừ khi có người giám sát hoặc hướng dẫn sử dụng.
- Người lớn cần hướng dẫn trẻ em không được chơi đùa với quạt.
- Nếu dây nguồn bị hỏng, chỉ được thay thế bởi nhà sản xuất, trung tâm bảo hành hoặc kỹ thuật viên có chuyên môn, để đảm bảo an toàn.


2. Thông số kỹ thuật

| | |
|------------------------|---|
| Mã sản phẩm | ECO-F40AI-B |
| Cấp độ gió | 12 cấp độ gió, 4 chế độ ngủ |
| 4 chế độ gió | Chế độ gió trẻ em, chế độ gió tự nhiên, chế độ ngủ, Chế độ gió thông minh |
| Nguồn điện tiêu thụ | 40W / Động cơ AC |
| Loại điều khiển | Điều khiển bằng giọng nói AI + Remote + Bảng điều khiển kỹ thuật số |
| Khoảng cách luồng gió | ≥6.2 mét |
| Khối lượng tịnh (N.W.) | 3.8 kg |
| Khối lượng tổng (G.W.) | 5.3 kg |
| Kích thước sản phẩm | 310 × 310 × 1080 mm |

3. Sơ đồ mạch điện

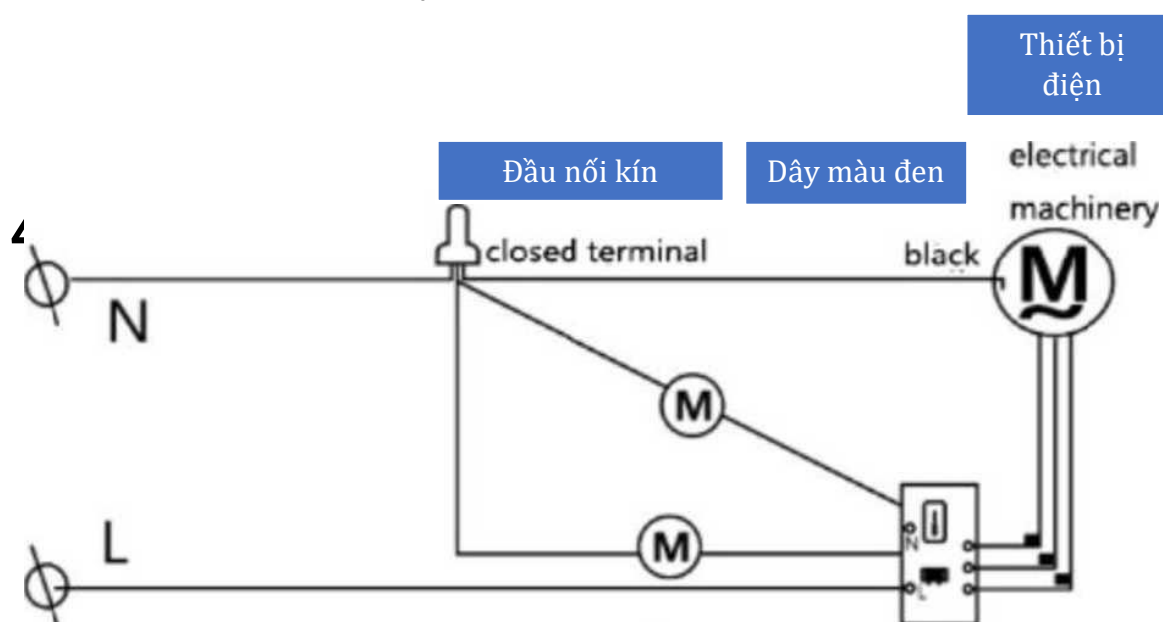


*Nút điều khiển trên thân máy

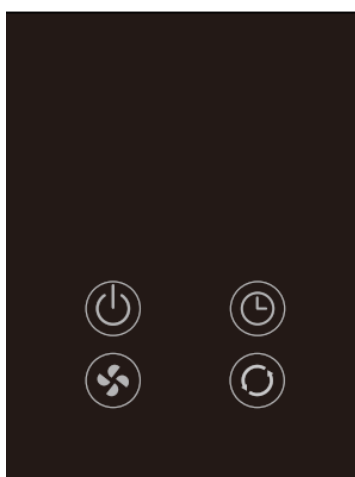



4.1. Trạng thái chờ: Khi cắm phích điện vào nguồn, màn hình LCD sẽ sáng và hiển thị “— —”, thiết bị sẽ chuyển sang trạng thái chờ.

4.2. Bật / Tắt nguồn:

- Nhấn nút nguồn một lần để bật quạt tuần hoàn, thiết bị sẽ khởi động ở mức gió mặc định là cấp 6, màn hình hiển thị -06-.
- Nhấn nút một lần nữa để tắt toàn bộ chức năng và trở về trạng thái chờ.

4.3. Chạm vào nút  để điều chỉnh tốc độ gió. Tổng cộng có thể điều chỉnh 12 tốc độ (01 -12), và tốc độ gió tăng dần từ 1-12.

4.4. Chạm vào nút  để cài đặt thời gian. Màn hình hiển thị "00". Mỗi lần nhấn sẽ thêm 1 giờ (hiển thị 01, 02 ...tối đa 12 giờ). Sau 12 giờ sẽ lặp lại "00". Sau khi cài đặt, màn hình kỹ thuật số sẽ nhảy trở lại màn hình hiển thị tốc độ gió.

4.5. Chức năng quay của quạt: 

- Chạm một lần: Bật chế độ quay trái - phải.
- Chạm lần thứ hai: Quay lên - xuống.
- Chạm lần thứ ba: Quay trái - phải, lên - xuống.
- Chạm lần thứ tư: Tắt tất cả chế độ quay.


4.6. Tự động tắt màn hình và đánh thức:


- Khi không hoạt động trong 3 phút và bảng điện tử sẽ chuyển sang trạng thái tắt màn hình.
- Nhấn bất kỳ nút nào để đánh thức bảng điện tử (hiển thị trạng thái hiện tại).
- Nhấn nút dưới thứ hai để vận hành.




4.7. Điều chỉnh độ sáng đèn ngủ:

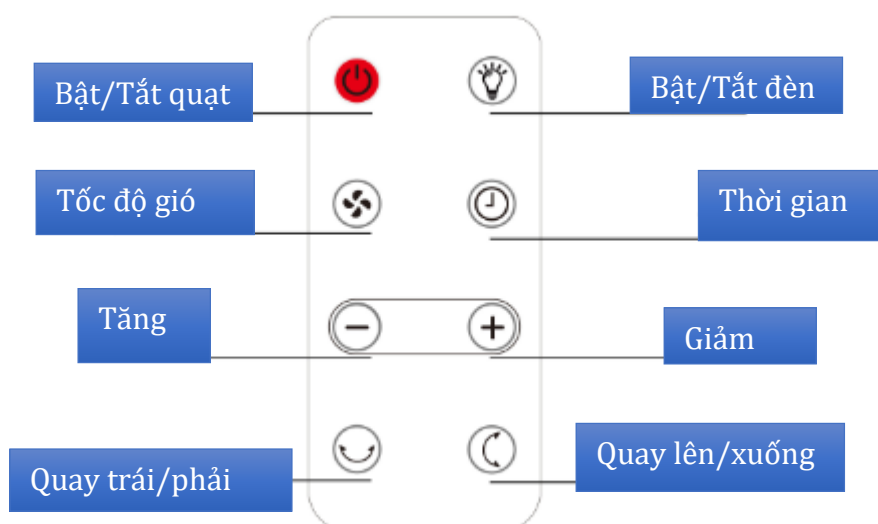


- Nhấn và giữ nút "hẹn giờ" để bật hoặc tắt đèn. Thao tác này cũng có thể được thực hiện ở chế độ chờ (bật hoặc tắt đèn). (Điều khiển bằng giọng nói cũng tương tự).
- Đèn ngủ cũng có thể tắt ở chế độ chờ.



*Nút remote điều khiển



Nút Bật/Tắt: Để bật hoặc tắt chức năng và vào chế độ chờ, hãy nhấn nút . Đồng thời, còi sẽ phát ra tiếng "bíp" để nhắc nhở. Nút này cũng tăng chức năng tốc độ gió. Sau khi quạt khởi động, quạt sẽ tự động vào chế độ gió tự nhiên.


Phím tốc độ gió: Đầu tiên nhấn , sau đó   Phím để điều chỉnh từ 1-12 tốc độ.

Phím thời gian: Đầu tiên nhấn , sau đó   để cài đặt thời gian tự động tắt quạt, từ 1-12h.

Phím quay trái/phải: Khi quạt đang bật, nhấn  nhấn và quạt sẽ quay sang phải và trái, nhấn  nhấn thì quạt sẽ quay lên và xuống. Nếu bạn muốn dừng quay, nhấn lại phím này và quạt sẽ ngừng.

Nút bật/tắt đèn: Nhấn  để bật/tắt đèn.

5. Cấu tạo sản phẩm

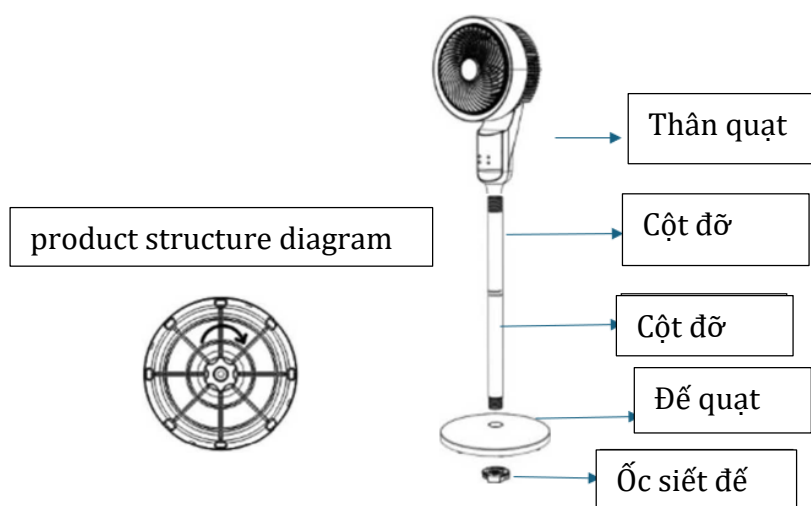

Lắp ráp sản phẩm

5.1 Lấy thanh cột có đai ốc khóa ra khỏi hộp đóng gói và xoay đai ốc khóa ngược chiều kim đồng hồ để tháo.

5.2 Lắp ráp hai thanh cột lại với nhau theo vòng quay.

5.3 Lấy khung máy ra, lắp một đầu của đai ốc khóa siết chặt thanh cột vào lỗ giữa của khung máy và siết chặt đai ốc khóa ở mặt sau của khung máy vặn chặt.

5.4 Lấy phần đầu quạt ra, lắp phần thân vào đầu quạt và xoay vặn chặt vào thanh cột.

*Lưu ý: Cần lưu ý rằng không được tự tay điều chỉnh góc quay của đầu quạt, vì trục xoay được điều khiển bởi động cơ đồng bộ. Nếu xoay bằng tay sẽ làm hỏng động cơ.

6. Bảng câu lệnh giọng nói

| Câu lệnh người dùng nói | Câu lệnh quạt trả lời |
|-------------------------|--|
| | Chào mừng chủ nhân của tôi, để ra lệnh vui lòng nói "Xin chào Kosmen" |
| Xin chào Kosmen | Vâng, tôi có thể giúp gì Vâng, xin chào chủ nhân |
| | Nếu muốn ra lệnh gì vui lòng gọi lại tôi bằng cách nói "Xin chào Kosmen" |
| Tăng âm lượng | Đã tăng âm lượng |
| Giảm âm lượng | Đã giảm âm lượng |
| Âm lượng lớn nhất | Đã chỉnh âm lượng tối đa |
| Âm lượng nhỏ nhất | Đã chỉnh âm lượng nhỏ nhất |
| Tắt tiếng | Vâng, đã tắt tiếng |
| Bật tiếng | Vâng, đã bật tiếng |
| Mở tiếng | Vâng, đã bật tiếng |
| Mở quạt | Vâng, đã mở quạt |
| Bật quạt | Vâng, đã mở quạt |
| Tắt quạt | Vâng, đã tắt quạt |
| Bật số một | Đã mở số một |
| Bật số hai | Đã mở số hai |
| Bật số ba | Đã mở số ba |
| Bật số bốn | Đã mở số bốn |
| Bật số năm | Đã mở số năm |
| Bật số sáu | Đã mở số sáu |
| Bật số bảy | Đã bật số bảy |
| Bật số tám | Đã bật số tám |
| Bật số chín | Đã bật số chín |
| Bật số mười | Đã bật số mười |
| Bật số mười một | Đã bật số mười một |
| Bật số mười hai | Đã bật số mười hai |
| Đặt hẹn một giờ | Đã hẹn tắt sau một giờ |
| Đặt hẹn hai giờ | Đã hẹn tắt sau hai giờ |
| Đặt hẹn ba giờ | Đã hẹn tắt sau ba giờ |
| Đặt hẹn bốn giờ | Đã hẹn tắt sau bốn giờ |
| Đặt hẹn năm giờ | Đã hẹn tắt sau năm giờ |
| Đặt hẹn sáu giờ | Đã hẹn tắt sau sáu giờ |
| Đặt hẹn bảy giờ | Đã hẹn tắt sau bảy giờ |
| Đặt hẹn tám giờ | Đã hẹn tắt sau tám giờ |
| Đặt hẹn chín giờ | Đã hẹn tắt sau chín giờ |
| Đặt hẹn mười giờ | Đã hẹn tắt sau mười giờ |
| Đặt hẹn mười một giờ | Đã hẹn tắt sau mười một giờ |
| Đặt hẹn mười hai giờ | Đã hẹn tắt sau mười hai giờ |
| Chế độ gió trẻ em | Đã bật chế độ gió trẻ em |
| Chế độ gió tự nhiên | Đã bật chế độ gió tự nhiên |

| | |
|--------------------------|------------------------------|
| Chế độ ngủ | Đã bật chế độ ngủ |
| Chế độ gió thông minh | Đã bật chế độ gió thông minh |
| Tắt hẹn giờ/đóng hẹn giờ | Đã hủy hẹn giờ |
| Bật xoay trái phải | Đã bật quay trái phải |
| Tắt xoay trái phải | Đã dừng quay trái phải |
| Bật quay lên xuống | Đã bật quay lên xuống |
| Dừng quay lên xuống | Đã dừng quay lên xuống |
| Bật quay hình số tám | Đã bật quay hình số tám |
| Dừng quay hình số tám | Đã dừng quay hình số tám |
| Mở đèn/bật đèn | Vâng, đã bật đèn |
| Tắt đèn | Vâng, đã tắt đèn |

7. Vệ sinh, bảo hành, bảo trì

- Trước khi vệ sinh và bảo dưỡng, vui lòng tắt quạt và rút dây nguồn ra khỏi ổ cắm.
- Đối với các khu vực bẩn ở bên ngoài thiết bị, bạn có thể sử dụng chất tẩy rửa trung tính để làm ẩm một miếng vải và lau, sau đó lau sạch bằng khăn mềm.
- Không sử dụng dung môi dễ bay hơi như toluen, cồn hoặc xăng để lau vỏ nhựa vì điều này có thể làm đổi màu hoặc hư hỏng nhựa
- Không nhúng sản phẩm này vào nước để vệ sinh hoặc rửa sạch bằng vòi nước.
- Nếu không sử dụng sau khi vệ sinh, vui lòng bảo quản sản phẩm này ở nơi khô ráo.

*Điều khoản bảo hành

1. Trong thời gian bảo hành, hãy sử dụng sản phẩm trong điều kiện bình thường, trường hợp xảy ra lỗi, bạn có thể liên hệ Kosmen để được bảo hành.

2. Trong thời gian bảo hành, dịch vụ bảo trì có trả phí sẽ được thực hiện trong các trường hợp sau:

- Các lỗi và thiệt hại gây ra bởi các trường hợp bất khả kháng.

- Hỏng hóc, hư hỏng do vận chuyển, bốc xếp.

- Hỏng hóc và hư hỏng do không vận hành theo hướng dẫn vận hành.

- Lỗi hoặc hư hỏng do tháo dỡ, sửa chữa hoặc sửa đổi sản phẩm mà không có sự cho phép của nhà sản xuất.

3. Khi sản phẩm cần bảo hành quý khách vui lòng gửi máy đến địa chỉ gần nhất của Kosmen để được bảo hành.

Thời gian bảo hành

Khách hàng sẽ được hưởng 1 năm dịch vụ bảo hành miễn phí kể từ ngày mua hàng.

| Bộ phận sản phẩm | Chất độc hại | | | | | |
|------------------------------|--------------|------|------|----------|-------|--------|
| | (Pb) | (Hg) | (Cd) | (Cr(VI)) | (PBB) | (PBDE) |
| Các bộ phận nhựa | X | O | O | X | X | X |
| Các bộ phận kim loại | O | O | O | X | O | O |
| Dây điện | X | O | X | O | O | O |
| Bộ phận quay | X | O | X | X | O | O |
| Công tắc lựa chọn | X | O | O | X | X | X |
| Bảng mạch & điều khiển từ xa | X | O | X | X | X | X |
| Keo | O | O | X | O | O | O |
| Dây nguồn | O | O | O | O | X | X |
| Động cơ cực che khuất | X | O | O | X | X | X |

O: Chỉ ra rằng hàm lượng chất độc hại trong tất cả các vật liệu đồng nhất của bộ phận đó đều thấp hơn yêu cầu giới hạn được quy định trong ROHS.

X: Chỉ ra rằng hàm lượng chất độc hại trong ít nhất một trong các vật liệu đồng nhất của bộ phận vượt quá yêu cầu giới hạn được chỉ định trong ROHS.

Minh họa:

Một số mẫu có thể không bao gồm một số bộ phận trong bảng, điều này tùy thuộc vào sản phẩm thực tế.

Các bộ phận được đánh dấu *X* không thể thay thế bằng các chất nguy hiểm do hạn chế về trình độ phát triển công nghệ của ngành.



CÔNG TY CỔ PHẦN KOSMEN

Trụ sở chính: Số 27B Đường số 12, Phường Hiệp Bình, Thành phố Hồ Chí Minh

Hotline: 0965 210 874 - 0888 787 959

VP Hà Nội: Số NV4.7 Khu đô thị mới Cầu Bươu, Phường Thanh Liệt, Thành phố Hà Nội

Hotline: 0766 899 799 - (024) 7308 7688

VP Đà Nẵng: Số 41 Đường Võ An Ninh, Phường Hòa Xuân, Thành phố Đà Nẵng

Hotline: 0935 696 695

VP Đà Lạt: Số 38/7 Hẻm Ba Tháng Hai, Phường Xuân Hương - Đà Lạt, Tỉnh Lâm Đồng

Hotline: 0961 061 076 - 0965 210 874